



For more information,  
Contact [sales@pyroptic.com](mailto:sales@pyroptic.com)


### Description

PyrOclip enables easy attachment of PyrOnodes on a wide range of insulated cable diameters and cylindrical applications. The PyrOclip is also an ideal choice for retrofitment on existing cable connections as the cable tie fixing allows for attachment without needing to unbolt terminations. An installation guide is available for download on the PyrOptic website, [Mounting and Accessories](#) page.

### Features

- Quick and efficient cable attachment
- Simple two piece design for quick and secure PyrOnode installation
- Suitable for a wide range of cable sizes 4 to 800mm<sup>2</sup>
- Suitable for cable insulation ratings up to 115°C
- For use with heat stabilised 2.4mm cables ties (Panuit BT2M-M30)

### Product Image

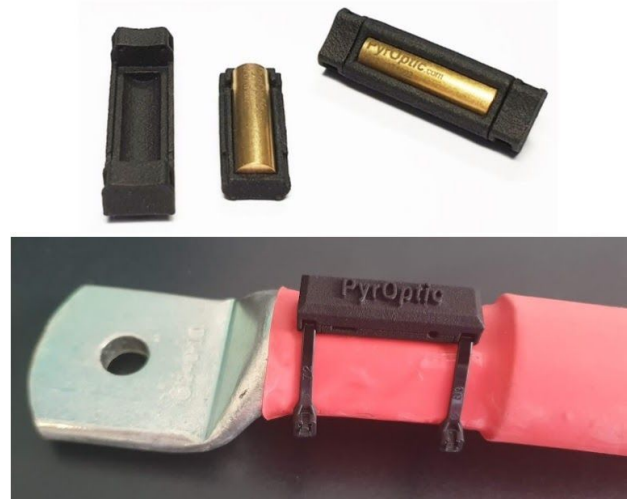

### Specifications

Feature	Data	Notes
Materials	Polyamide 12 (PA12)	Colour black
Dimensions	34.5L x 10.1W x 9.2H (mm)	Assembled
Weight	2.0gms	Excluding cable tie
Installation Temperature	-40 ~ 115°C	No physical deterioration
Cable Tie	Panuit BT2M-M30	2.4 x 201mm heat stabilised

Please contact PyrOptic sales for pricing - [sales@pyroptic.com](mailto:sales@pyroptic.com)

### Pricing

Order Code	Description	Pack Size <sup>^</sup>	Price (AUD)*
PYR-CBLT	PyrOclip cable tie mount	6, 12 & 100	POA

\*Prices are subject to change and exclude GST

<sup>^</sup>Custom quantities can be provided on request.