



For more information,
Contact sales@pyroptic.com


Description

PyrO mould is used with high temperature epoxy putties such as ThreeBond 2089B and PC-Fahrenheit to make installation easy, fast and neat. An installation guide is available for download on the PyrOptic website, [Mounting and Accessories](#) page.

Features

- Reusable (epoxy does not stick to them)
- Greatly speeds application
- Reduces epoxy waste
- Ensures neat appearance
- Creates large adhesive contact area for a very high strength bond
- Can be used in any orientation without clamping
- Enables precise horizontal alignment of the fibre guide holes with the substrate being bonded too.

Product Image

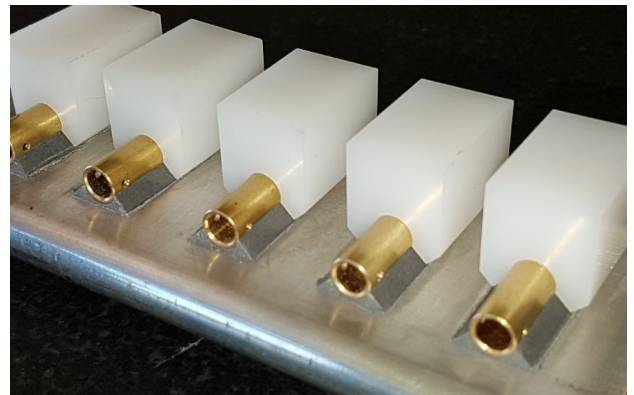

Specifications

| Feature | Data | Notes |
|------------|------------------------------|-------------------|
| Materials | Polyethylene | |
| Dimensions | 22mm x 15mm x 16mm L x W x H | Subject to change |

All prices are subject to change and do not include GST

Pricing

| Order Code | Description | Pack of 6 | | |
|------------|----------------------|-----------|--|--|
| PYR-MLD | PyrO mould form tool | \$60 each | | |