



For more information,  
Contact [sales@pyroptic.com](mailto:sales@pyroptic.com)


### Description

PyrO mould is used with high temperature epoxy putties such as ThreeBond 2089B and PC-Fahrenheit to make installation easy, fast and neat. An installation guide is available for download on the PyrOptic website, [Mounting and Accessories](#) page.

### Features

- Reusable (epoxy does not stick to them)
- Greatly speeds application
- Reduces epoxy waste
- Ensures neat appearance
- Creates large adhesive contact area for a very high strength bond
- Can be used in any orientation without clamping
- Enables precise horizontal alignment of the fibre guide holes with the substrate being bonded too.

### Product Image

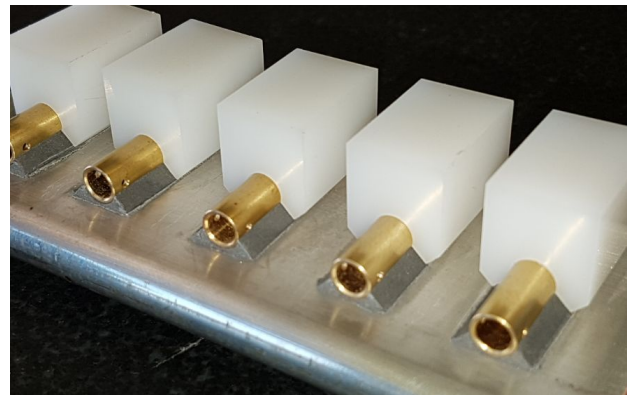

### Specifications

Feature	Data	Notes
Materials	Polyethylene	
Dimensions	22mm x 15mm x 16mm L x W x H	Subject to change

Please contact PyrOptic sales for pricing - [sales@pyroptic.com](mailto:sales@pyroptic.com)

### Pricing

Order Code	Description	Pack of 6		
PYR-MLD	PyrO mould form tool	POA		